

PRODUCT DATASHEET

TRUSYS UNIV P 50W 840 W CL PS

TRUSYS UNIVERSAL | The solution for refurbishment - universal fitting to existing trunking luminaire system

Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Industry halls, high rack warehouse, hardware stores
- Discounters, supermarkets



PERFOR-
MANCE
CLASS

Product benefits

- The solution for refurbishment: universal fitting to existing trunking luminaire system
- Easy installation, no tools required for connection
- Energy saving and cost-effective
- Flexible application due to a range of different lumen packages and beam angles

Product features

- Multi Lumen function: power steps selectable
- Beam angles: 120° (VW), 90° (W), 60° (N), 30° (VN)
- Click into place solution with smart click buttons
- Luminous efficacy: up to 185 lm/W
- Lifetime (L80/B10): up to 100,000 h (at 25 °C)
- Initial color consistency: ≤ 3 SDCM




TECHNICAL DATA**Electrical data**


Nominal wattage	50 W / 40 W / 30 W / 20 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	230mA / 180mA / 135mA / 90 mA
Inrush current	22.6 A
Inrush current time T_{h50}	247 μ s
Max. number of luminaires per miniature circuit breaker B16	14
Max. number of luminaires per miniature circuit breaker C10	13
Max. number of luminaires per miniature circuit breaker C16	21
Power factor λ	≥ 0.90
Total harmonic distortion	< 15 %
Protection class	I
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	9000 lm / 7400 lm / 5550 lm / 3700 lm
Luminous efficacy	180 lm/W / 185 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	< 3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	90 °

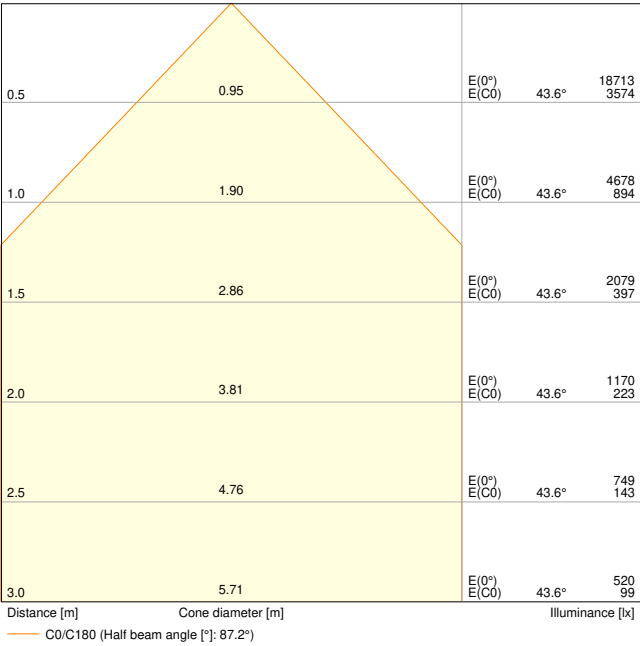

TRUSYS UNIV P 50W 840 W CL PS

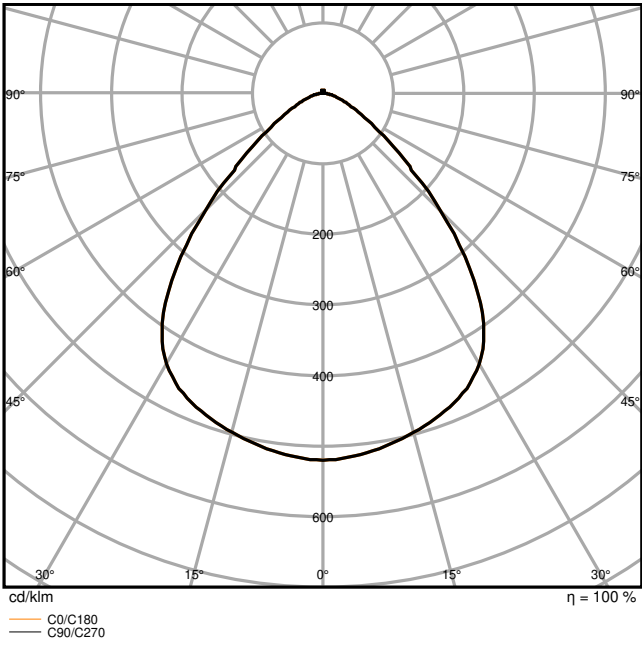


TRUSYS UNIV P 50W 840 W CL PS

Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
50 W	4000 K	9000 lm	180 lm/W
40 W	4000 K	7400 lm	185 lm/W
30 W	4000 K	5550 lm	185 lm/W
20 W	4000 K	3700 lm	185 lm/W

Dimensions & Weight

Length	1504.00 mm
Width	68.00 mm
Height	26.00 mm
Product weight	1615.00 g



TRUSYS UNIV P 73/75W 840 CL
PS/DALI

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-40...+80 °C
Type of connection	Plug-In connection
Type of protection	IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Surface/Suspended
Mounting location	Mounting rail
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	120000 h ¹⁾
Lifespan L80/B10 at 25 °C	100000 h ¹⁾
Lifespan L90/B10 at 25 °C	54000 h
Number of switching cycles	50000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	500mA / 400mA / 300mA / 200 mA
ECG - Output ripple current	< 5 %

Emergency lighting

Type of Emergency Lighting (EL)	EL certified driver (0Hz / DC operation) for central battery operation included
Type of emergency operation test	None
Wattage in emergency operation mode	50 W
Luminous flux in emergency operation mode	9000 lm

Certificates & Standards

Standards	CE / CB / UKCA / ENEC / TÜV / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

Additional product data

Added function	MULTI SELECT
----------------	--------------

EQUIPMENT / ACCESSORIES

– Various accessories available

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	UI TRUSYS UNIVERSAL
	Legal information	Informationstext 18 Abs 4 ElektroG


Documents and certificates		Document name
	Legal information	Legal insert
	Legal information	Safety Insert G11205497
	Declarations of conformity	CE declaration TRUSYS UNIVERSAL
	Declarations of conformity UKCA	UKCA declaration TRUSYS UNIVERSAL
Photometric and lighting design files		Document name
	IES file (IES)	TRUSYS UNIV P 50W 840 W CL PS
	LDT file (Eulumdat)	TRUSYS UNIV P 50W 840 W CL PS
	UGR file (UGR table)	TRUSYS UNIV P 50W 840 W CL PS
	Light distribution curve type cone	TRUSYS UNIV P 50W 840 W CL PS
	Light distribution curve type polar	TRUSYS UNIV P 50W 840 W CL PS
CAD/BIM files		Document name
	BIM Revit 3D	TruSys Universal
	CAD STEP 3D	TRUSYS UNIV
Tender texts		Document name
	Tender documents	TRUSYS UNIVERSAL 50W 840 W CL PS-en

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854496622	Folding box 1	93 mm x 1,540 mm x 69 mm	1905.00 g	9.88 dm ³
4099854496639	Shipping box 4	1,545 mm x 295 mm x 110 mm	9080.00 g	50.14 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

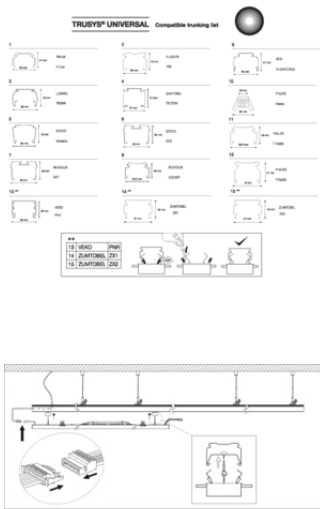


TruSys UNIVERSAL 50W ON/OFF

W	LM	1	2	3
20W	3700	—	—	—
30W	5550	—	ON	—
40W	7400	—	—	ON
50W	9000	—	ON	ON

TruSys UNIVERSAL 73W ON/OFF

W	LM	1	2	3	4
41W	7380	—	—	—	ON
49W	8720	—	—	ON	—
57W	10030	—	ON	—	—
66W	11420	ON	—	—	—
73W	12400	—	—	—	—



1x TRUSYS UNIV	2x TRUSYS UNIV	...	nx TRUSYS UNIV
Clk A	Clk B	Clk C	Clk D
13	14	21	22
15	16	23	24
17	18	25	26
19	20	27	28
21	22	29	30
23	24	31	32
25	26	33	34
27	28	35	36
29	30	37	38
31	32	39	40
33	34	41	42
35	36	43	44
37	38	45	46
39	40	47	48
41	42	49	50
43	44	51	52
45	46	53	54
47	48	55	56
49	50	57	58
51	52	59	60
53	54	61	62
55	56	63	64
57	58	65	66
59	60	67	68
61	62	69	70
63	64	71	72
65	66	73	74
67	68	75	76
69	70	77	78
71	72	79	80
73	74	81	82
75	76	83	84
77	78	85	86
79	80	87	88
81	82	89	90
83	84	91	92
85	86	93	94
87	88	95	96
89	90	97	98
91	92	99	100
93	94		
95	96		
97	98		
99	100		

TRUSYS UNIV 50W ONCHG	TRUSYS UNIV 75W ONCHG	TRUSYS UNIV 50W DALS	TRUSYS UNIV 75W DALS
13	14	21	22
15	16	23	24
17	18	25	26
19	20	27	28
21	22	29	30
23	24	31	32
25	26	33	34
27	28	35	36
29	30	37	38
31	32	39	40
33	34	41	42
35	36	43	44
37	38	45	46
39	40	47	48
41	42	49	50
43	44	51	52
45	46	53	54
47	48	55	56
49	50	57	58
51	52	59	60
53	54	61	62
55	56	63	64
57	58	65	66
59	60	67	68
61	62	69	70
63	64	71	72
65	66	73	74
67	68	75	76
69	70	77	78
71	72	79	80
73	74	81	82
75	76	83	84
77	78	85	86
79	80	87	88
81	82	89	90
83	84	91	92
85	86	93	94
87	88	95	96
89	90	97	98
91	92	99	100
93	94		
95	96		
97	98		
99	100		

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.