

PRODUCT DATASHEET

LN INV D 1500 P 52W 940 DAVR SN BK

LINEAR INDIVILED DIRECT 1500 DALI SENSOR | Surface mounted luminaire for single or light line office application with CRI90 and DALI sensor, 1500 mm



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- Single and continuous line configuration
- Direct lighting



Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90 and up to 130 lm/W
- IoT-ready luminaire with DALI-2 driver, suitable for VIVARES and other Light Management Systems
- Symmetric light distribution for various application areas
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- High color consistency with SDCM 3
- Easy installation
- Low flicker light thanks to special electronic control gear
- Suitable for battery emergency installations acc. to EN 60598-2-22
- Multiple mounting options thanks to different accessories

Product features

- Minimalistic LEDVANCE SCALE design in extruded aluminum housing, available in white and black color



- Includes EVERLOOP: Convenient replacement of light source and LED driver
- PIR-Sensor with leader-follower function
- Combined daylight and motion detection
- Individual adjustment of the parameters with configuration software or remote control
- Linkable into seamless light line with accessories (surface or pendant mounting)
- Pendant mounting with suspension kit (to be ordered separately)
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Lifetime (L80/B10): 70,000 h (at 25 °C)
- Multi lumen function: programmable DALI-2 driver


TECHNICAL DATA

Electrical data

Nominal wattage	52 W / 48 W / 44 W / 39 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	232...210...200...185 mA
Inrush current	25.2 A
Inrush current time T_{h50}	40 μ s
Max. number of luminaires per miniature circuit breaker B16	29
Max. number of luminaires per miniature circuit breaker C10	23
Max. number of luminaires per miniature circuit breaker C16	38
Power factor λ	> 0.90
Total harmonic distortion	$\leq$ 20 %
Protection class	I
Operating mode	Integrated LED driver
Dimming interface	DALI-2 / IoT

Photometrical data

Luminous flux	6250 lm / 5850 lm / 5700 lm / 5100 lm
Luminous efficacy	120 lm/W / 122 lm/W / 130 lm/W / 131 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	$\geq$ 90
Standard deviation of color matching	3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	$\leq$ 1
Stroboscope effect metric (SVM)	$\leq$ 0.4
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 °
UGR	< 19




LN INV D 1500 P 52W 940 DAVR
BK

Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
52 W	4000 K	6250 lm	120 lm/W
48 W	4000 K	5850 lm	122 lm/W
44 W	4000 K	5700 lm	130 lm/W
39 W	4000 K	5100 lm	131 lm/W

Dimensions & Weight

Length	1475.00 mm
Width	125.00 mm
Height	43.00 mm
Product weight	3870.00 g



LN INV 1200 P

Materials & Colors

Product color	Black
Housing color	Black
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	Yes
Type of dimming	DALI2
IoT ready	Support of DALI data type PART 251, 252, 253 ¹⁾
Mounting type	Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	Yes

¹⁾ Internet of Things. Supports data transfer via gateway to cloud-based monitoring platforms, such as LEDVANCE VIVARES Cloud

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	70000 h ¹⁾
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	1050mA / 975mA / 900mA / 800 mA
ECG - Output ripple current	≤ 5 %
Recommended control gear	OSRAM type OTI DALI 50/220-240/1A4 NFC L

Sensor

Type of sensor	Motion / Light
Sensor technology	Passive infrared/Photocell
Sensor detection angle	80 °
Sensor controlled switching time	10 s ... 30 min
Detection range of motion sensor	1.7 m ... 4 m

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	By the end consumer

Additional product data

Added function	EVERLOOP / Programmable Multi Lumen
----------------	-------------------------------------

Accessories Optional

Product image	Product name	EAN
	LN INV SUSPENSION KIT BK	4099854297069
	LN INV SUSPENSION WIRE	4099854323980
	LN INV 1500 THROUGHWIRING KIT	4099854214806
	LN INV INLINE CONNECTOR	4099854215612

Product image	Product name	EAN
	LN INV CORNER CONNECTOR BK	4099854308079
	LN INV INFILL 600 BK	4099854297045
	LN INV INFILL 1200 BK	4099854297007
	LN INV INFILL 1500 BK	4099854297021

EQUIPMENT / ACCESSORIES

- Suspension kit available for pendant luminaire version (to be ordered separately)
- Inline, corner and infill connectors available as separate accessory
- Through-wiring cable kit available

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	LN INV D DI
 Legal information	Safety Insert G11205497
 Legal information	Legal Insert G11235610
 Legal information	Informationstext 18 Abs 4 ElektroG

Documents and certificates		Document name
	Legal information	LN INV D DI
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
	Certificates	LN INV
	EU Data Act	DALI LED Driver and Luminaires
Photometric and lighting design files		Document name
	IES file (IES)	LN INV D 1500 P 52W 940 DAVR SN BK
	LDT file (Eulumdat)	LN INV D 1500 P 52W 940 DAVR SN BK
	ULD file (DIALux)	LN INV D 1500 P 52W 940 DAVR SN BK
	ROLF file (RELUX)	LN INV D 1500 P 52W 940 DAVR SN BK
	UGR file (UGR table)	LN INV D 1500 P 52W 940 DAVR SN BK
	Light distribution curve type polar	LN INV D 1500 P 52W 940 DAVR BK
CAD/BIM files		Document name
	BIM Revit 3D	Linear Indiviled G2
	CAD STEP 3D	LN INV D 1500 G2
Tender texts		Document name
	Tender documents	LINEAR INDIVILED DIRECT 1500 DALI SENSOR P 52W 940 DAVR SN BK-EN

LOGISTICAL DATA



Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854371820	Folding box 1	177 mm x 1,530 mm x 102 mm	4570.00 g	27.62 dm³
4099854371837	Shipping box 2	1,550 mm x 197 mm x 224 mm	10740.00 g	68.40 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

LINEAR INVDILED* DIRECT DALI SN BK	DRIVER	mA	W	lm	lm/W	PF
LN INV D 1200 P 40W 930 DAVR SN BK	OSRAM OPTI DALI 50h 220-360V 1A4 NFCL	600 120 300	25 50 100	3000 6000 12000	120 120 120	94%
LN INV D 1200 P 40W 940 DAVR SN BK	OSRAM OPTI DALI 50h 220-360V 1A4 NFCL	600 120 300	40 80 160	4800 9600 19200	116 116 116	94%
LN INV D 1500 P 52W 930 DAVR SN BK	OSRAM OPTI DALI 50h 220-360V 1A4 NFCL	600 120 300	35 70 140	4200 8400 16800	120 120 120	94%
LN INV D 1500 P 52W 940 DAVR SN BK	OSRAM OPTI DALI 50h 220-360V 1A4 NFCL	600 120 300	48 96 192	5760 11520 23040	121 121 121	94%
LN INV D 1500 P 52W 940 DAVR SN BK	OSRAM OPTI DALI 50h 220-360V 1A4 NFCL	600 120 300	48 96 192	5760 11520 23040	122 122 122	94%

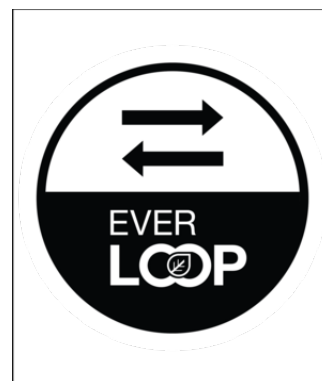

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.