

# PRODUCT DATASHEET LED Bulkhead 11W 4000K White

LED BULKHEAD | Wall and ceiling luminaires



### Areas of application

- Outdoor
- Basements, garages, warehouses

#### **Product benefits**

- Easy and quick installation
- Energy-efficient thanks to LED technology

### **Product features**

- Bright and functional outdoor LED luminaires
- Type of protection: IP54



# TECHNICAL DATA

# Electrical data


Nominal wattage	11.00 W
Nominal voltage	220240 V
Mains frequency	5060 Hz
Nominal current	105.000 mA
Power factor $\lambda$	> 0.5
Protection class	П
Operating mode	Mains voltage

# Photometrical data

Luminous flux	840 lm
Total luminous flux of contained light sources	1200 lm
Luminous efficacy	76 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	≥80
Beam angle	120 °

# Dimensions & Weight

Length	143.00 mm
Width	79.00 mm
Height	216.00 mm
Product weight	245.00 g

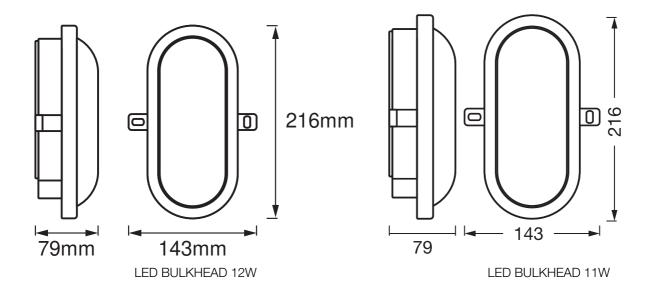

## Materials & Colors

Product color	White
Housing color	White
Body material	Polycarbonate (PC)
Cover material	Acrylonitrile butadiene styrene (ABS)
Mercury content	0.0 mg

# Application & Mounting

Ambient temperature range	-20+40 °C
Type of connection	Screw terminal
Type of protection	IP54
Protection class IK (shock resistance)	IK06
Dimmable	No
Mounting type	Surface
Application environment	Outdoor
With light source	Yes
Replaceable light source	No

# Lifespan

Lifespan L70/B50 at 25 °C	30000 h <sup>1)</sup>

Number of switching cycles	25000
S 7	

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

## Certificates & Standards

Standards	CE / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	No
Replaceable light source (EPREL)	Not replaceable

# Additional product data

Number of illuminants empty
-----------------------------

### **EQUIPMENT / ACCESSORIES**

- Complete mounting and connecting accessories included

# Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.

## DOWNLOAD DATA

	ocuments and certificates Document name	
PDF	User instruction / safety instructions	LED BULKHEAD
PDF	Legal information	Safety insert G11219279
PDF	Declarations of conformity	LED BULKHEAD 11W 840
POF	Declarations of conformity UKCA	Fixed LUM

# LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854428654	Folding box	86 mm x 150 mm x 225 mm	393.00 g	2.90 dm <sup>3</sup>
4099854428661	Shipping box 6	315 mm x 273 mm x 245 mm	2360.00 g	21.07 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## **DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.