

# PRODUCT DATASHEET

## SST PAR 16 50 36° 4.6 W/2700K GU10

LED SUPERSTAR PAR16 GLOWdim | LED reflector lamps PAR16 with GLOWdim effect



### AREAS OF APPLICATION

- Hospitality
- Historical buildings
- Residential interiors
- Marine lighting
- Outdoor applications only in suitable luminaires

### PRODUCT BENEFITS

- Provides an especially warm light when dimmed down
- Directly controllable via standard dimmer, no remote control required
- Can be easily combined with other GLOWdim products in one application
- Very long lifetime of up to 25,000 h
- Low energy consumption
- Easy relamping thanks to compact design

### PRODUCT FEATURES

- LED alternative to conventional lamps
- Dimming changes light color from warm white (2,700 K) to extra warm white (2,000 K)
- Good quality of light; color rendering index  $R_a \geq 80$
- Dimmable (with many common dimmers, see also [www.ledvance.com/dim](http://www.ledvance.com/dim))
- Mercury-free lamps



## TECHNICAL DATA



### Electrical data

Rated wattage	4.60 W
Nominal wattage	4.60 W
Nominal voltage	220...240 V
Max. lamp no. on circuit break. 10 A (B)	20
Max. lamp no. on circuit break. 16 A (B)	30
Operating frequency	50...60 Hz

### Photometrical data

Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Luminous flux	350 lm
Color rendering index Ra	≥80
Luminous intensity [PIM]	600 cd
Nominal luminous flux	350 lm
Rated color temperature	2700 K

### Dimensions & weight



Overall length	54.0 mm
----------------	---------

### Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	70 °C

### Lifespan

Nominal lamp life time	25000 h
Rated lamp life time	25000 h

Number of switching cycles	100000
----------------------------	--------

## Additional product data

Base (standard designation)	GU10
Mercury-free	Yes
Product remark	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

## Capabilities

Dimmable	Yes
----------	-----


## Certificates &amp; standards

Energy efficiency class	A+
-------------------------	----

## Country-specific categorizations

Order reference	LSPAR16GLD50 4,
-----------------	-----------------

## Light Distribution

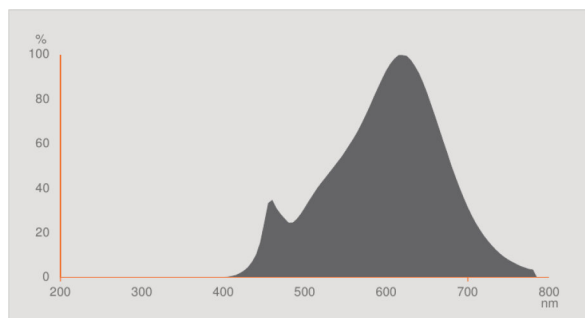

## Spectral power distribution

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075105393	Blister 1	52 mm x 140 mm x 120 mm	69.00 g	0.87 dm <sup>3</sup>
4058075105409	Shipping carton box 6	322 mm x 154 mm x 135 mm	528.00 g	6.69 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.